


EFFECTIVE CONTROL FOR INDUSTRIAL APPLICATIONS

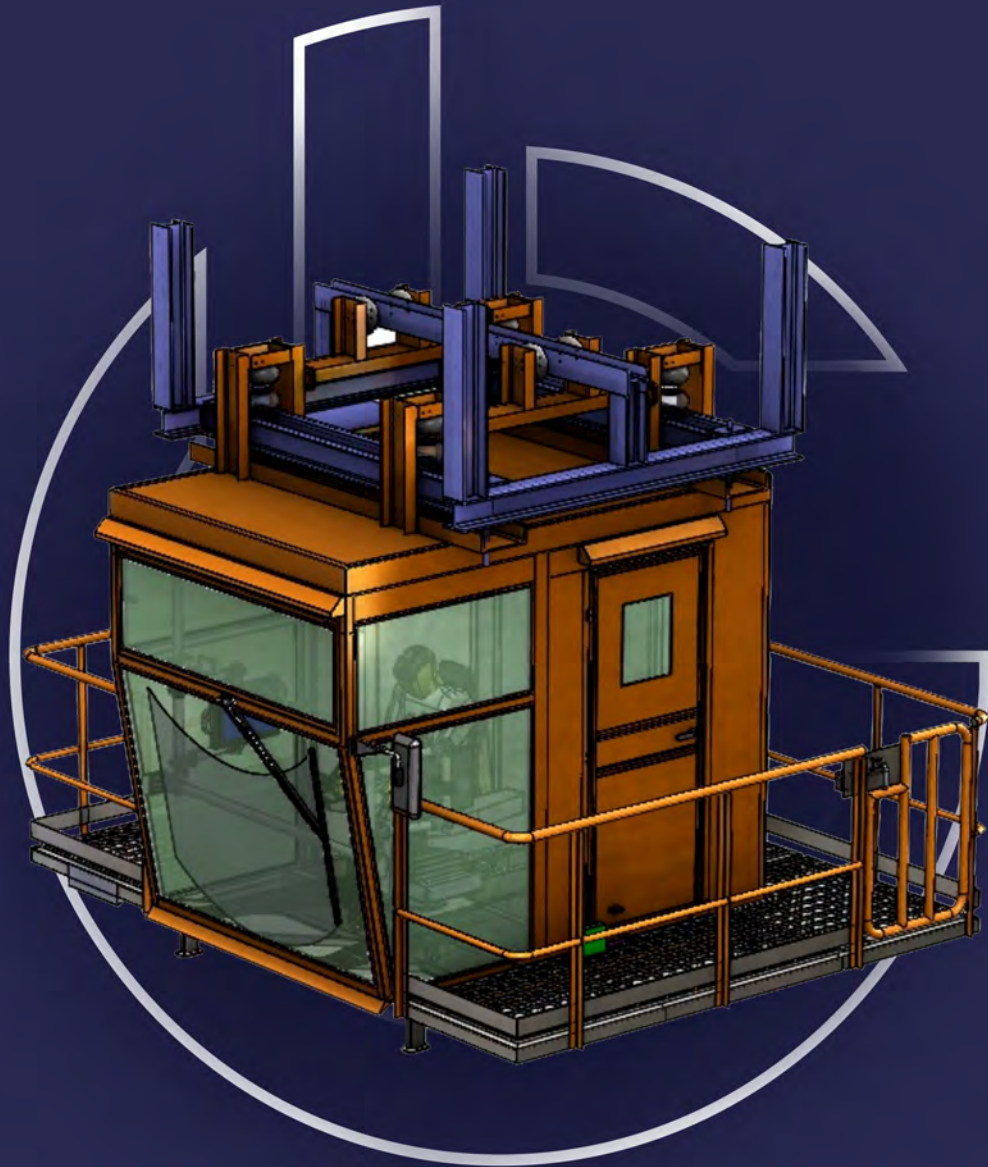

STS CABIN

 GL MAKINA

TECHNICAL PROPERTIES

GENERAL

ADJUSTMENT INSTALLATION	SELF ADJUSTING TYPE REAR MOUNT (RM) FRONT MOUNT (FM)
FILLING TEMPERATURE	OIL / NITROGEN -10 C TO +80 C (STANDARD) -40 C TO +120 C (SPECIAL)
PISTON ROD APPLICATION	PLASMA COATING (20 μ) OVERHEAD CRANES CONTAINER CRANES STACKER CRANES TRANSFER CARS RAILWAY APPLICATIONS

COATING

BODY	/ SYNTHETIC RESIN / COLOR OPTIONAL / 80 μM
------	--




IMPROVE THE WORKING ENVIRONMENT

By adding some additional equipments, you can improve the working environment of crane operator.



BEST WAY TO MODERNIZATION

If you transmit to us electric schemes, we able to prepare control knobs and buttons as a turnkey product.

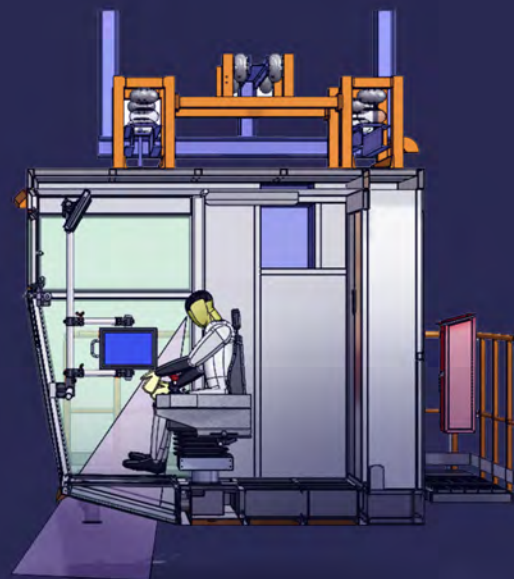

QUESTIONNAIRE

SPECIFICATION	STANDARD	OPTIONAL
GENERAL		
40 mm wall and 60 mm ceiling and floor insulation	Standard	
Cable entrance at side wall, rear wall, roof or floor at your choice		Optional
Entrance door (rear or side)	Standard	
Rubber pad on the floor (5 mm)	Standard	
Platform (mountable or fixed)		Optional
Lower front window (openable or fixed)		Optional
Ladder at rear wall (mountable or fixed)		Optional
Cabin suspension		Optional
ELECTRICAL		
Terminal cabinet		Optional
Cabin light (inside the cabin)		Optional
Light switch and power socket outlet		Optional
Radio with CD – 12 V DC		Optional
Horn with foot switch		Optional
Wiper/washer (24V or 12V)		Optional
3 line plug		Optional
PAINTING		
Surface treatment by solvent	Standard	
Primer epoxy 120 micron, final 50 micron polyurethane	Standard	
Shotblasting to SA 2,5		Optional
Specified paint up to 300 micron		Optional
Inside color different from outside color		Optional
GLASS		
5 mm tempered safety glass	Standard	
3+3 laminated safety glass		Optional
Double glazing tempered thermoglass (5/9/5)		Optional
Walkable safety floor glass (120 kg at 1 point)		Optional
ACCESSORIES		
Fire extinguisher 2 kg (powder or CO2 at your choice)		Optional
Waste container		Optional
Coat hooks and personal compartment		Optional
Instructor's tip-up seat		Optional
Mirror		Optional
Sunblinds at 3 upper windows		Optional
Screen holder		Optional
Sliding foot grids		Optional
Door lock with panic bar		Optional
AIRCO		
Industrial type monoblock air conditioner		Optional
Split type air conditioner		Optional
Foot heater (2kw)		Optional

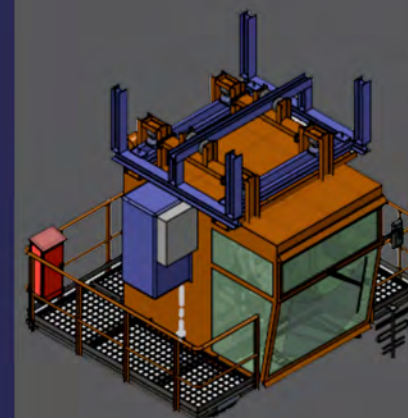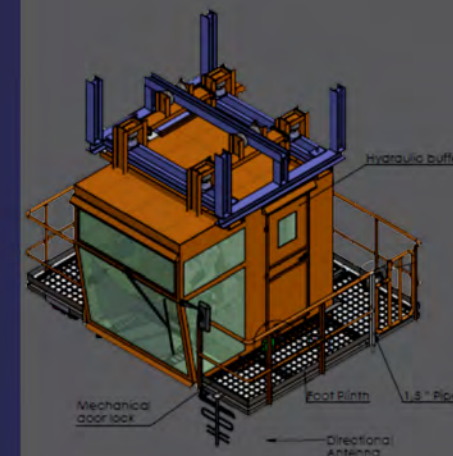



 GL MAKINA

GL Makina Ltd. Co.
T. +90 312 395 63 17
F. +90 312 395 64 17

www.glmakina.com
info@glmakina.com